

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
27 July 2006 (27.07.2006)

PCT

(10) International Publication Number  
**WO 2006/078005 A1**

(51) International Patent Classification:

**H05B 33/12** (2006.01) **H05B 33/24** (2006.01)  
**H01L 51/50** (2006.01)

(21) International Application Number:

PCT/JP2006/300921

(22) International Filing Date: 17 January 2006 (17.01.2006)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2005-013688 21 January 2005 (21.01.2005) JP

(71) Applicant (for all designated States except US): **SEMI-CONDUCTOR ENERGY LABORATORY CO., LTD.** [JP/JP]; 398, Hase, Atsugi-shi, Kanagawa, 2430036 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SEO, Satoshi** [JP/JP]; c/o SEMICONDUCTOR ENERGY LABORATORY CO., LTD., 398, Hase, Atsugi-shi, Kanagawa, 2430036 (JP). **NODA, Takeshi. YAMAZAKI, Shunpei.**

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LIGHT EMITTING DEVICE

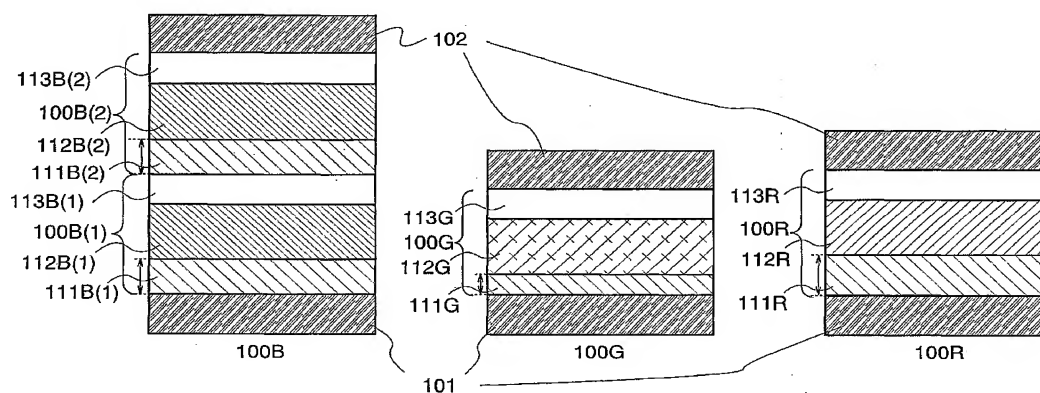

(57) Abstract: It is an object of the invention to provide a light emitting device which can display a superior image in which luminescent color from each light emitting layer is beautifully displayed and power consumption is lowered in a light emitting element in which light emitting layers are stacked. One feature of the invention is that, in a light emitting element which comprises light emitting layers stacked between electrodes, each distance between each light emitting layer and an electrode is approximately oddly multiplied 1/4 wavelength by controlling a thickness of a layer provided therebetween to enhance luminous output efficiency. Another feature of the invention is that a drive voltage is lowered using a high conductive material for the layer compared with a conventional element.



WO 2006/078005 A1